

I) ATTENZIONE!

Togliere la corrente prima di eseguire qualsiasi collegamento elettrico o sostituire le lampadine.

- 1) Fissare a soffitto la staffa ed il gancio della tige **A**, quindi eseguire il collegamento della linea di alimentazione elettrica al morsetto.
- 2) Infilare nella tige **A** la montatura **B** e bloccarla serrando adeguatamente la rondella e il dado **C**. Avvitare nella tige il tubetto **E** e fissarlo con il dado previsto.
- 3) Avvitare le lampadine e infilare sui perni esterni della montatura le foglie piccole **1** fissandole con le rondelle dorate **D** e successivamente nei perni interni le foglie grandi **2**.
- 4) Infilare il fondino **3** regolando la quota con la rondella interna **F** e fissarlo al tubetto **E** avvitando il finalino **4**.



(GB) WARNING!

Switch off the current before connecting or relamping.

- 1) *Fasten mounting bracket with stem and hook **A** to ceiling and make up the connection using the proper binding post.*
- 2) *Mount fixture body **B** over stem and secure it with washer and lock nut **C**, then screw nipple **E** into end of stem with proper nut.*
- 3) *Install bulbs and first attach the small crystal leaves **1** with glass retainer nut **D** on the outer pins, then the large crystal leaves **2** on the inner pins.*
- 4) *Adjust position of washer **F** then attach glass bowl **3** with glass knob **4** to nipple **E**.*





(USA) WARNING!

Switch off the current before connecting or relamping.

RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

DO NOT ATTACH TO OUTLET BOX, FIXTURE OVER 50 POUNDS.

- 1) *Fasten mounting bracket with stem and hook **A** to ceiling and make and make the electric connection to power line.*
- 2) *Mount fixture body **B** over stem and secure it with washer and lock nut **C**, then screw nipple **E** into end of stem with proper nut.*
- 3) *Install bulbs and first attach the small crystal leaves **1** with glass retainer nut **D** on the outer pins, then the large crystal leaves **2** on the inner pins.*
- 4) *Adjust position of washer **F** then attach glass bowl **3** with glass knob **4** to nipple **E**.*

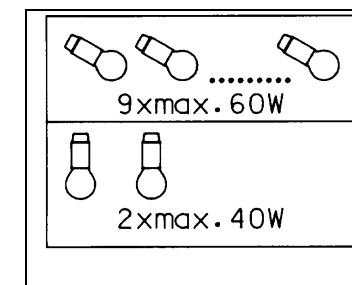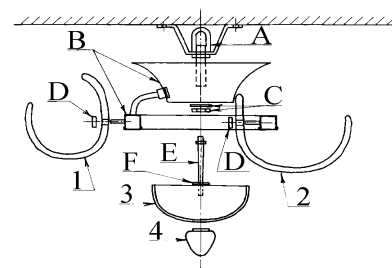

Nota:

Bloccare in modo sicuro il dado con la rondella anti-svitamento **C** in modo che non si allenti applicando un momento torcente non superiore a 5,0 Nm.

Il dado con rondella per il bloccaggio del tubetto **E** non deve allentarsi applicando un momento torcente non superiore a 2,5 Nm.

Remark:

Washer and nut **C** shall be securely attached in such a way it will not be possible to loosen locked connections by attempting with a torque not exceeding 5,0 Nm.

Washer and nut of stem **E** shall not loosen locked connections by attempting with a torque not exceeding 2,5 Nm.

REX - Plafoniera decorativa
Ceiling Lamp

- | | |
|----------------------------------|----------------------------------|
| ☐ 5357/CR | ☐ 5357/VR |
| ☐ 5357/OR | ☐ 5357/RR |
| ☐ 5357/GR | |

Altezza/height	26 cm – 10” ¹ / ₄
Ø/diameter	63cm – 24” ³ / ₄
Peso/weight	20Kg – 44 lb

- | | |
|--|---|
| ☐ 100 - 120V
50Hz / 60Hz | ☐ 220- 240V
50Hz / 60Hz |
|--|---|

N° 9 x max 60W
N° 2 x max 40W

- | | |
|------------------------------|---|
| ☐ E14 | ☐ E12(candelabra base) |
|------------------------------|---|
- Cl. I

