

I) ATTENZIONE!

Togliere la corrente prima di eseguire qualsiasi collegamento elettrico o sostituire le lampadine.

- 1) Fissare a soffitto la staffa ed il gancio della tige **A**, quindi infilare la montatura **B** ed eseguire il collegamento della linea di alimentazione elettrica al morsetto.
- 2) Bloccare la montatura **B** alla tige **A** serrando adeguatamente la rondella e il dado **C**. Avvitare nella tige il tubetto **E** e fissarlo con rondella e dado previsto.
- 3) Avvitare le lampadine e infilare sui perni esterni della montatura le foglie piccole **1** fissandole con le rondelle dorate **D** e successivamente nei perni interni le foglie grandi **2**.
- 4) Infilare il fondino **3** regolando la quota con la rondella interna **F** e fissarlo al tubetto **E** avvitando il finalino **4**.


1

(USA) WARNING!

Switch off the current before connecting or relamping.

RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

- 1) Fasten the mounting bracket with the stem to outlet box to ceiling. Connect fixture ground wire (yellow/green) to ground supply Black or Marked wire from fixture to line (hot) supply, White or Transparent wire from fixture to white (neutral) supply. **WARNING: KEEP THE PROPER POLARITY.**
- 2) Mount the fixture body **B** over stem and secure it with washer and lock nut **C**, then screw nipple **E** into end of stem with proper washer and nut.
- 3) Install bulbs and first attach the small crystal leaves **1** with glass retainer nut **D** on the outer pins, then the large crystal leaves **2** on the inner pins.
- 4) Adjust position of washer **F** then attach glass bowl **3** with glass knob **4** to nipple **E**.

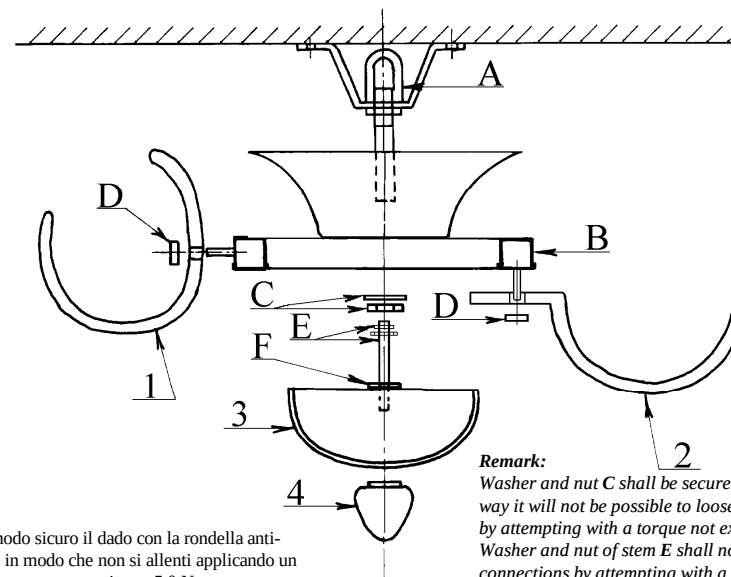

Nota:

Bloccare in modo sicuro il dado con la rondella anti-svitamento **C** in modo che non si allenti applicando un momento torcente non superiore a 5,0 Nm.
Il dado con rondella per il bloccaggio del tubetto **E** non deve allentarsi applicando un momento torcente non superiore a 2,5 Nm.

Remark:

Washer and nut **C** shall be securely attached in such a way it will not be possible to loosen locked connections by attempting with a torque not exceeding 5,0 Nm.
Washer and nut of stem **E** shall not loosen locked connections by attempting with a torque not exceeding 2,5 Nm.

r 5387/CR

r 5387/OR

r 5387/GR

r 5387/VR

r 5387/RR

Plafoniere Decorative

MINIREX

Altezza/height cm 24 – 9 ½”

Ø. cm 48 – 18 ⅞”

Peso/weight ~ 10 Kg. – 22 pounds

r 100-120 V **r** 220V-240V

50Hz~60Hz

9 x max 40W

E14 r E17 r E12 r (candelabra base)

CL.I

CE